




Double Sided Fireplace

- VFDS 800/1000 -

The Double Sided Fireplace is ideal for heating up a space in the home where a dividing wall separates two areas or rooms.

Available in two sizes and multiple finish options, the Double sided Fireplace is the perfect fit when creating two feature areas that share a common wall.

The Double Sided 800 and 1000 is capable of heating a combined area of 108m² and 131m² respectively.

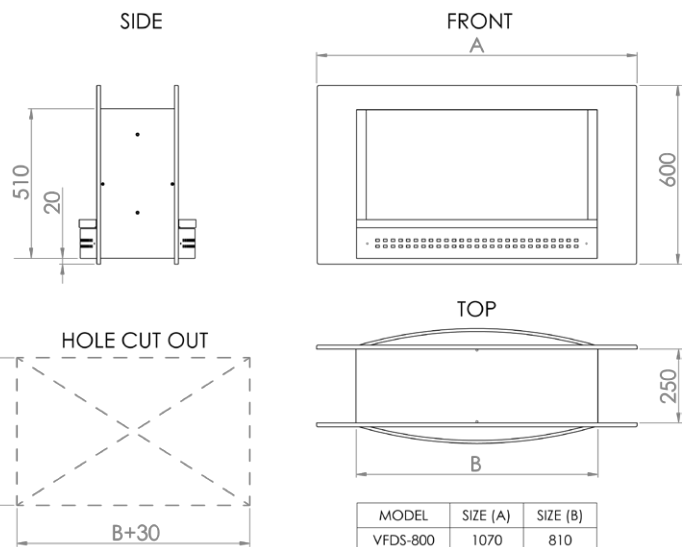

MODEL	SIZE (A)	SIZE (B)
VFDS-800	1070	810
VFDS-1000	1220	980



SAFETY, STYLE & QUALITY THAT LASTS


CHAD-O-CHEF
Lifestyle products

Since 1983



Double Sided Fireplace

- VFDS 800/1000 -

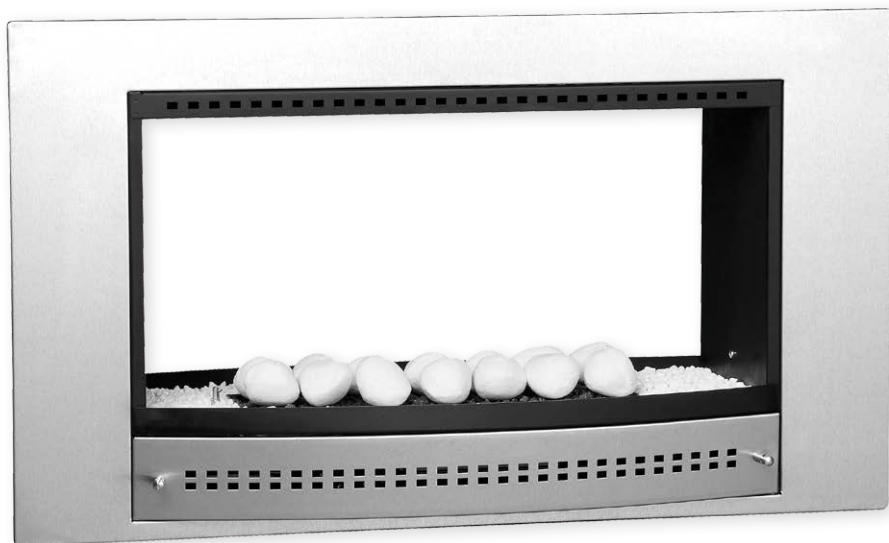

SPECIFICATIONS

Model	VFDS800	VFDS1000
Gas type	LPG or Nat.	LPG or Nat.
Operating pressure	2,8 kPa	2,8 kPa
Min. Regulator size	2 kg/hr	2 kg/hr
Gas consumption (Max.)	0.64 kg/hr	0.75 kg/hr
mJ input (Max.)	36 mJ/hr	37.5 mJ/hr
kW input (Max.)	9 kW/hr	10.6 kW/hr
Gas inlet connection	Ø8mm comp.	Ø8mm comp.
Ignition	Piezo Spark	Piezo Spark
Oxygen Depletion System (ODS)	min 18.5% O ₂	min 18.5% O ₂
Coals	14	22
Pebbles	12	18
Min. Room size	97m ³	101m ³
Max. Room size	399m ³ (108m ²)	416m ³ (131m ²)

INSTALLATION INSTRUCTIONS

The Double Sided Fireplace is designed to fit through a cut out in a Double brick wall, and has clearance for +-10mm of screeding on either side of the wall.

The aperture in the wall needs the support of two load bearing lintels above the Double sided fireplace, before it can be installed.

FIREPLACE FINISHES

Stainless Frame



Black Frame



BURNER FINISHES

White Ceramic Pebbles



Black Ceramic Coals



Aztec Gold Glass



Azure Blue Glass



Crystal Clear Glass



Diamond Black Glass

